1.99″
0.78″
5.51″
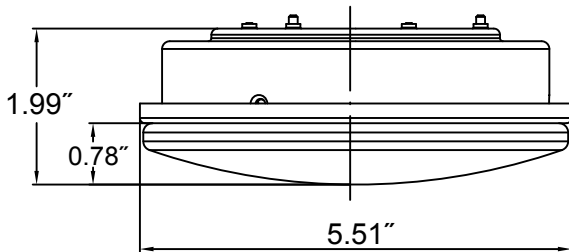
Net Weight: 0.40 lbs

INSTALLATION REQUIREMENTS:
Remove the steel cap from fan and install
the light kit.

ELECTRICAL REQUIREMENTS:
Requires a grounded electrical supply line of 120 volts AC,
60Hz, 15 amp circuit.

LIGHTING BULBS:
One 16-watt CCT LED (3000K/4000K/5000K) included.

CONTROL:
TR305 hand-held remote control is available in Motor Asm.
package.

LOCATION USE:
Light kit is rated for dry and damp locations.

Available Finishes	
BL	Black with Opal Frosted
BN	Brushed Nickel with Opal Frosted
BS	Brushed Satin Brass with Opal Frosted
DZ	Dark Bronze with Opal Frosted
GR	Matte Greige with Opal Frosted
MW	Matte White with Opal Frosted

Light Bulb Information (120V)				
Bulb Type	Watts	Lumens Amount	Color Temp	CRI
LED	16	1500	3000/4000/5000	90%