


**WRAP™ CUSTOM**

**MAD8530\*\*  
Ceiling Fan**

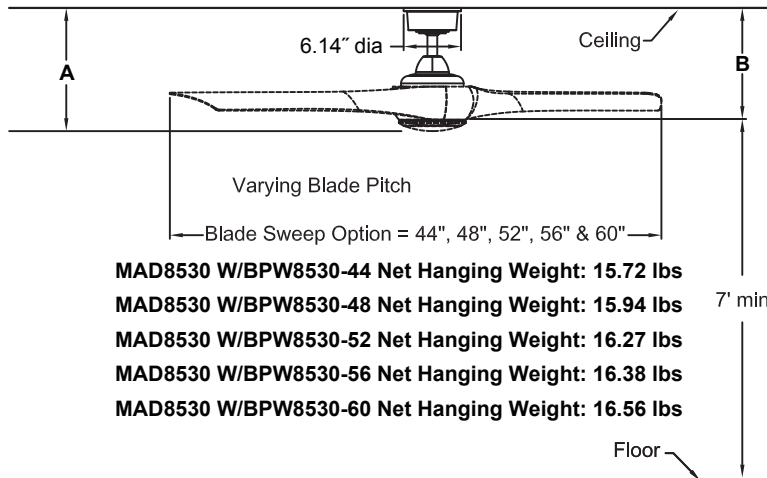

- MAD8530 W/BPW8530-44 Net Hanging Weight: 15.72 lbs**
- MAD8530 W/BPW8530-48 Net Hanging Weight: 15.94 lbs**
- MAD8530 W/BPW8530-52 Net Hanging Weight: 16.27 lbs**
- MAD8530 W/BPW8530-56 Net Hanging Weight: 16.38 lbs**
- MAD8530 W/BPW8530-60 Net Hanging Weight: 16.56 lbs**

	A	B
Fan w/4.5" downrod	12.46"	11.83"
Fan w/12" downrod	19.96"	19.33"
Fan w/18" downrod	25.96"	25.33"
Fan w/24" downrod	31.96"	31.33"
Fan w/36" downrod	43.96"	43.33"
Fan w/48" downrod	55.96"	55.33"
Fan w/60" downrod	67.96"	67.33"
Fan w/72" downrod	79.96"	79.33"

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

158 x 22 sensorless DC motor is designed for optimal performance with this fan.

**BLADES:**

3 bladed blade sets are available in plastic materials— all sold separately. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for blade options.

**CONTROL OPTIONS:**

A WiFi receiver and TR305 hand-held remote control are included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Visit the Apple APP Store or Google Play Store to download the free fanSync WiFi APP and create your Fanimation fanSync account. Optional TW306 wall control is available — sold separately. Instructions are provide with each control.

**LIGHTING OPTIONS:**

LK8530- One 18-watt CCT LED (3000K/4000K/5000K).

**DOWNROD OPTIONS:**

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 24" downrod or longer downrod (Measured with BPW8530-64 Blade). Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well-sold separately. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry and damp locations.

The 42 inch - 48 inch fans are for rooms up to 225 sq ft. The 52 inch - 54 inch fans are for rooms up to 400 sq ft. The 56 inch or larger fans are for room over 400 sq ft.

Available Finishes	
BL	Black
BN	Brushed Nickel
BS	Brushed Satin Brass
DZ	Dark Bronze
GR	Matte Greige
MW	Matte White

Airflow / Energy Efficiency Info test with BPW8530-60 Blade in 60" sweep					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 <sup>th</sup> )	138	7141	200	0.49	36
Med (9 <sup>th</sup> )	88	4359	552	0.13	8
Low (1 <sup>th</sup> )	29	581	291	0.05	2

Energy Guide FTC Measured with BPW8530-60 Blades in 60" sweep			
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
24	5114	7	211