



AIREFLUSH™

LP6804**
52" Ceiling Fan

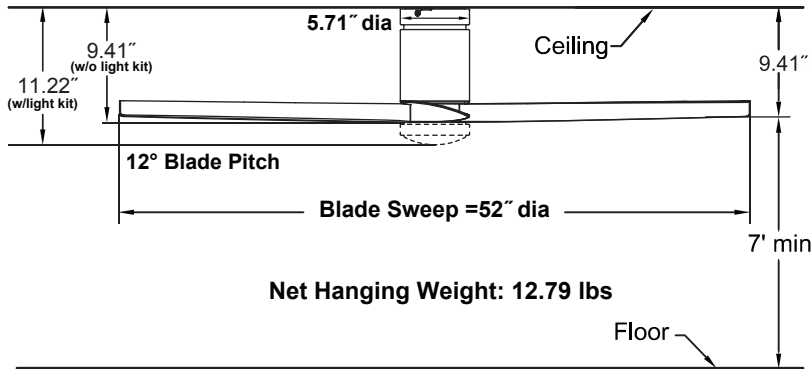

Ceiling Bracket
Width of the screw slot



INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

100 x 30 DC motor is designed for optimal performance with this fan.

BLADE SET:

A set of four 25" composite blades is included.

CONTROL OPTIONS:

TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions is provided with each control.

LIGHTING OPTIONS:

One 16-watt CCT LED (3000K/4000K/5000K) included.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room up to 400 sq ft.

Available Finishes

| | |
|-----|---|
| LBN | Brushed Nickel with Gray Blade and Opal Frosted Glass / Steel Cap |
| LMW | Matte White with Matte White Blade and Opal Frosted Glass / Steel Cap |

Airflow / Energy Efficiency Info (120V)

| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High | 166 | 5809 | 218 | 0.40 | 27 |
| Med | 103 | 3442 | 524 | 0.11 | 7 |
| Low | 29 | 866 | 328 | 0.05 | 3 |

Energy Guide FTC

| Power (W _{ave}) | Total Air Delivery (CFM _{ave}) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
|---------------------------|--|-----------------------------------|--------------------------------|
| 18 | 3493 | 5 | 193 |

Light Bulb Information (120V)

| Bulb Type | Watts | QTY | Lumens Amount | Color Temp | CRI |
|-----------|-------|-----|---------------|----------------|-----|
| LED | 16 | 1 | 1500 | 3000/4000/5000 | 90% |