


# **EIGHTYFOUR™**

# LP6827LBN (Lowes Item #5127853) 84" Ceiling Fan



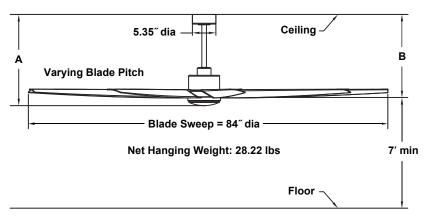

	Α	В
Fan w/12" downrod	20.80"	18.95″
Fan w/18" downrod	26.80"	24.95"
Fan w/24" downrod	32.80"	30.95"
Fan w/36" downrod	44.80″	42.95"
Fan w/48" downrod	56.80"	54.95"
Fan w/60" downrod	68.80″	66.95"
Fan w/72" downrod	80.80″	78.95″

#### **INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

#### **ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

#### **MOTOR SPECS:**

DC135L DC motor is designed for optimal performance with this fan.

#### **BLADE SET:**

A set of nine 38" composite blades is included.

### **CONTROL OPTIONS:**

TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions is provided with each control.

## **LIGHTING OPTIONS:**

One 24-watt CCT LED (3000K/4000K/5000K) included.

Available Finishes			
LBN	Brushed Nickel with Gray Blades and Opal Frosted Glass		

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 <sup>th</sup> )	68	11975	350	0.47	34
Med (9 <sup>th</sup> )	51	8757	767	0.18	11
Low (1 th)	30	5617	1397	0.08	4

	Energy	Guide FTC	
Power (Wave)	Total Air Delivery (CFMave)	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
22	8995	6	408

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	24	1	2000	3000/4000/5000	90%

# **DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 12" long downrod (DRT1-12). Optional downrods are available in 18", 24", 36", 48", 60" and 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 24" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

#### **LOCATION USE:**

Fan is rated for dry and damp locations. This fan is for room over 400 sq ft.